


Emboss The embossed art is to be made the same size as the actual art itself. No trapping is needed. Outline all fonts or submit fonts with art. Submit both AI and Pdf files. Bitmap files have to be saved in high resolution (at least 300 dpi). Vector files preferred. Separate Emboss art elements onto separate layer if possible. If not, please clearly define with annotations.


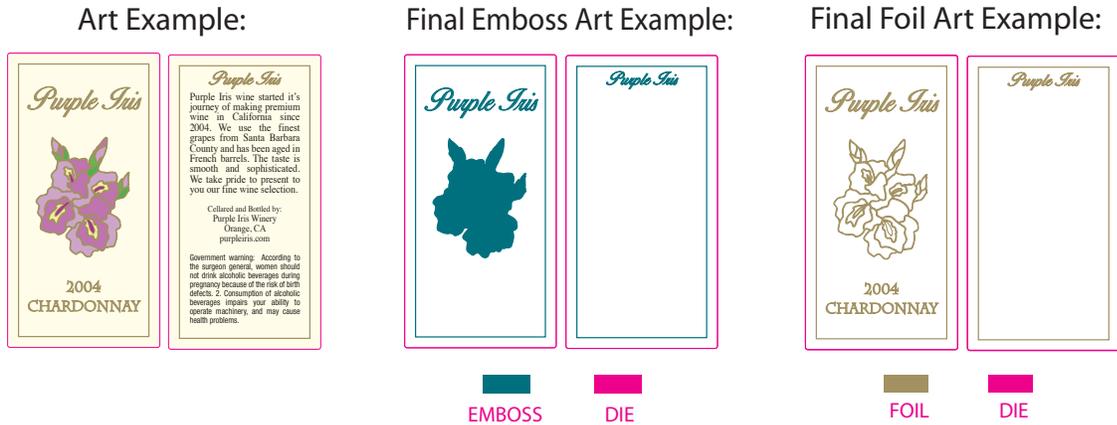


Foil The foil art is to be made the same size as the actual art itself. No trapping is needed. Labeltronix will do the trapping. Outline all fonts or submit fonts with art. Submit both AI and Pdf files. Bitmap files have to be saved in high resolution (at least 300 dpi). Vector files preferred.

Artwork Requirement:

- The thinnest area of positive text art needs to be 0.006" to fit the minimum requirement of hot stamp engraving to avoid disappearing.
- The thinnest area of reversed art or text needs to be 0.01" to fit the minimum requirement of hot stamp engraving to avoid clogging up.
- The space between art elements needs to be 0.03125" to avoid undesired result such as filling in or touching other elements.

| | | |
|---------------------------------------|--|--|
| 0.006" min. for thinnest foil area | 0.01" min. for thinnest reversed area | 0.03125" min. for space in between elements |
|---------------------------------------|--|--|

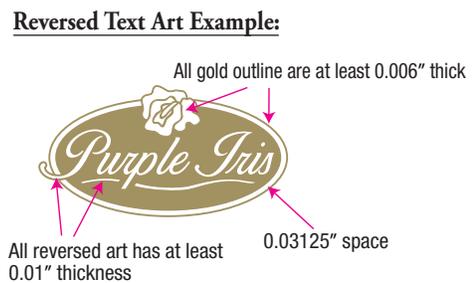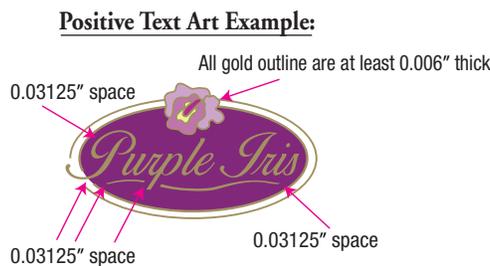

NOTE: The print-to-emboss/foil stamp registration has a +/- 1/64" tolerance. Some features may end up looking less than desirable if they do not account for this potential tolerance.

